



VIEWBOARDS

ViewBoard IFP6552-2F

Key Features


- Seamless plug-and-play connectivity with triple USB-C ports
- Intuitive Android™ 13 customizable launcher with draggable apps and widgets
- Advanced security controls and compliance standards that safeguard your data
- Enhanced collaboration with integrated myViewBoard software powered by Octa-core CPU

*Google, Android, YouTube, Google Maps and other marks are trademarks of Google LLC.



Product Omschrijving

Tap into limitless learning with the ViewBoard IFP52-2F Series. Certified under the Android Enterprise Device License Agreement (EDLA), it seamlessly harmonizes the Android™ 13 operating system with myViewBoard software and Google Play Store access to deliver enriched learning experiences enhanced by robust security features. Collaborate with split-screen multitasking; enjoy seamless connectivity and streamlined workflows empowered by triple USB-C ports and vCast wireless screen casting; and captivate remote and in-person students alike using its built-in microphones and front-facing speaker. Complete with a full range of compatible accessories, it invigorates learning experiences to take student engagement to new heights.

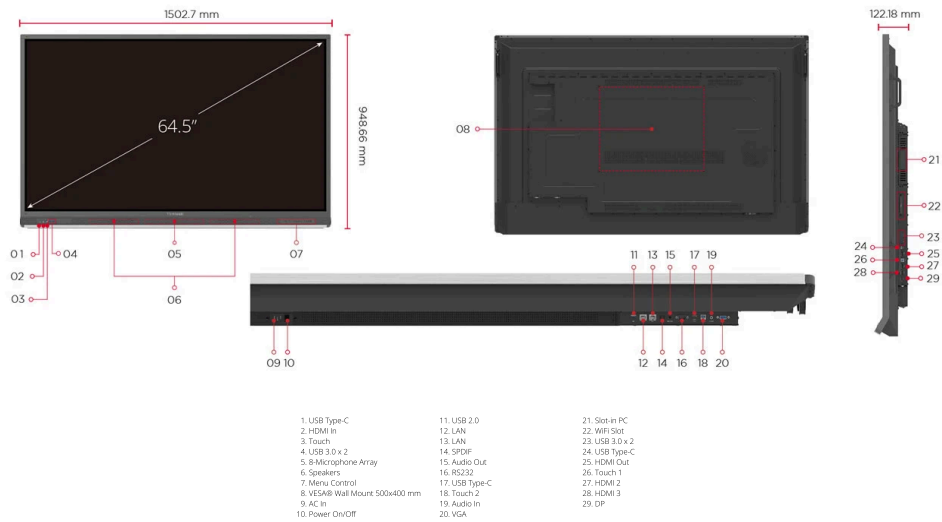

Bezoek Gebruikers

www.viewsonic.com

DISPLAY

Paneelgrootte:	65"
Paneeltype:	TFT LCD Module with DLED Backlight, IPS
Weergavegebied (mm):	1428.48(H) x 803.52 (V) (64.5" diagonal)
Aspectratio:	16:9
Resolutie:	UHD 3840x2160(Pixels)
Colors:	1.07B colours (10 bits)
Helderheid:	450 nits
Contrastverhouding:	4000:1(Typ.) 12000:1(max with DCR enabled)
Reactietijd:	≤6ms
Kijkhoeken:	H = 178, V = 178 typ.
Levensduur achtergrondverlichting:	50,000 hrs (typ).
Oppervlakte behandeling:	Glass Anti-Glare + 7H Mohs (9H pencil)
Oriëntatie:	Landscape

PLATFORM

Processor:	Octa-Core CPU (A73*4 + A53*4)
RAM:	8GB
Opslag:	64GB

TOUCH

Type:	UFT (Ultra Fine Touch) Technology
Touch resolutie:	32767 x 32767
Touch punt:	Windows: 40 points touch, Android: 20 points touch

INPUT

HDMI:	x3 (Frontx1:HDMI2.0 with CEC ; Rearx2:HDMI2.1 with CEC/ARC & HDMI 2.0 with CEC)
RGB/VGA:	x1
DisplayPort:	x1
Audio:	x1 (PC audio in)
RS232:	x1
OPS:	module slot x 1

OUTPUT

HDMI:	x1
Audio:	x1 (Earphone out)
SPDIF:	x1

LAN

RJ45:	x2
-------	----

USB

Type A:	USB3.0 x 4 (Front x 2; Rear x 2) USB 2.0x1 (Rear)
Type B:	USB 3.0 x3(Front x1; Rear x 2)
Type C:	x3 (Front x1 with USB3.0, DP1.2, Ethernet 100M, PD 65W; Rear x1 with USB3.0, DP1.2, Ethernet 100M, PD 100W; Rear x1 with USB3.0 data only)

SPEAKERS

20x2+20w

MICROPHONE

built-in 8-array microphone

TOP CAMERA PLATE

Yes

INGESLOTEN BESTURINGSSYSTEEM

Android 13

BUNDELSOFTWARE

Basis annotatiesoftware:	myViewBoard WhiteBoard for Android
Pro annotatiesoftware:	myViewBoard WhiteBoard for Windows (embedded in VPC)
Draadloze presentatie:	myViewBoard Display, vCast

SPECIALE EIGENSCHAPPEN

All-in-one USB port:	USB 3.0 "SmartPort USB" to all channels.
Eenvoudig delen via LAN tussen IFP en slot-in-apparaat:	10/100/1000M (USB Type-C 10/100, Android & PC 10/100/1000)
Light Sensor:	Yes

STROOM

Spanning:	100-240VAC +/- 10% Wide Range
Consumptie:	91.41W (Energy Star) / Off: <0.5W

ERGONOMICS

Wandmontage (VESA®):	500 x 400
----------------------	-----------

OPERATING CONDITIONS

Temperatuur (° C):	0°C to 40°C
Luchtvochtigheid:	20% ~ 80% RH non-condensing

AFMETINGEN (B X H X D)

Fysiek (inch/mm):	1502.7 x 948.66 x 122.18 mm / 59.161 x 37.349 x 4.81 in
Verpakking (inch / mm):	1618 x 1060 x 225 mm / 63.7 x 41.7 x 8.9 in

WEIGHT

Netto (lb / kg):	130.1 lb/59kg
Bruto (lb/kg):	149.9lb/68kg

REGULATIONS

NRTL w/ CA,FCC-B w, DOE Energy Star,DOE EPEAT, CE EMC, LVD or CB, RoHS Green BOM & RoHS DoC, ErP, REACH SVHC List & DoC, EEL, WEEE

VERPAKKINGSINHOUD

- 3m power cord by ship area
- Remote control with AAA battery
(new VS remote control)
- 3m touch USB cable
- Touch pen x 2 (a set)
- Quick Start Guide + Compliance statement
- RS232 adapter
- Clamp x 5
- Camera Plate
- Screw x 8 (camera 2+2, wall mount 4)
- HDMI cable 3m
- AAA Battery x 2
- Compliance statement

COMPATIBLE SLOT-IN PC

VPC35-W53-G1, VPC37-W53-G1