

ViewSonic® VIEWBOARDS ViewBoard IFP75G1


Toets Features

- Bring Your Own Device interactive display for versatile use in any scenario
- Upgradable framework for enhanced versatility and prolonged longevity
- Seamless USB-C plug-and-play connectivity with 65W power charging for convenient presentations
- Flexible integration with slot-in PCs, supporting Windows, Linux, and EDLA



Product Omschrijving

Transform teamwork and efficiency with the ViewBoard Genesis Series of Bring Your Own Device interactive displays. Boasting an upgradable framework, this series ensures versatility by seamlessly integrating with slot-in PCs across EDLA, Windows, and Linux operating systems. Through these integrations, it enables access to Google Workspace and Microsoft 365 productivity suites to elevate workspace dynamics. This versatility extends to its USB-C plug-and-play connectivity, enabling instant and fluid presentations from connected devices, regardless of their platform. Prioritizing productivity and peace of mind, the series emphasizes data security, ensuring sensitive information remains securely stored on connected devices for workflows that are truly safe and efficient.

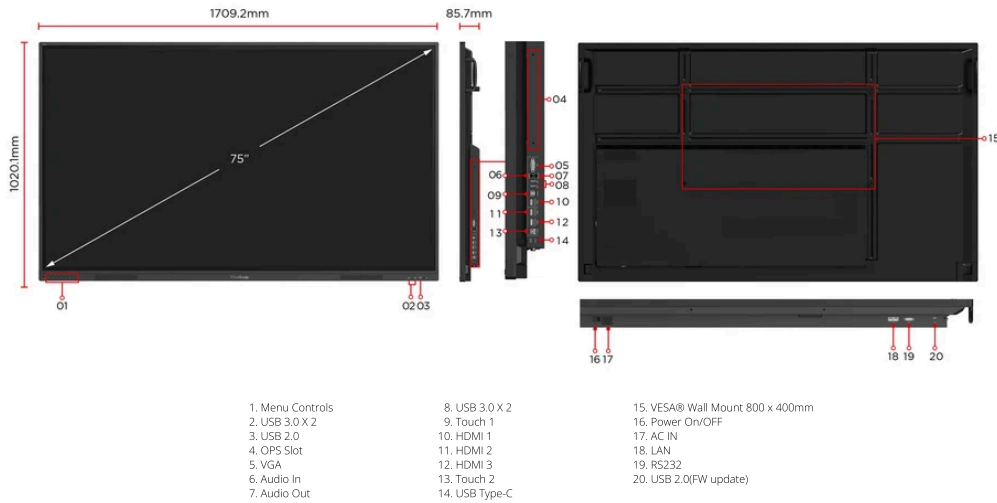

Bezoek Gebruikers www.viewsonic.com

DISPLAY

Paneelgrootte:	75"
Paneeltype:	TFT LCD Module with DLED Backlight.
Weergavegebied (mm):	1649.664(H) x 927.936 (V)
Aspectratio:	16:9
Resolutie:	UHD 3840x2160
Colors:	1.07G
Helderheid:	450nits
Contrastverhouding:	1200:1 (typ.) 6000:1 (DCR)
Reactietijd:	8ms
Kijkhoeken:	H = 178, V = 178 typ.
Levensduur achtergrondverlichting:	50,000 hours (Typ)
Oppervlakte behandeling:	Hardness: 9H, Anti-glare coating
Bezel:	Slim
Oriëntatie:	Landscape

TOUCH

Type:	Ultra Fine Touch Technology (IR Recognition)
Touch resolutie:	32767 x 32767
Touch punt:	Windows: 40 points of touch, Android : 20 points of touch

INPUT

HDMI:	Rear 2.0 x 3 (HDMI 1 & 3 Support CEC; HDMI 2 Supports CEC & ARC)
RGB/VGA:	x1
Audio:	x1
RS232:	x1
OPS:	x1

OUTPUT

Audio:	x1
--------	----

LAN

RJ45:	1 in 1 out
-------	------------

USB

Type A:	Front x3(USB2.0x1, USB3.0x2) Rear x3(USB3.0x2, 2.0 x1 for FW update)
Type B:	Rear x2 (USB 3.0x2)
Type C:	x1 (DP 1.2, Touch, Data Sharing, PD65W, Ethernet 10M/100M)

SPEAKERS

10W x 2

TOP CAMERA PLATE

Yes

COMPATIBILITY

HDMI:	3840x2160 @ 60Hz
-------	------------------

SPECIALE EIGENSCHAPPEN

All-in-one USB port:	"SmartPort™ USB" to all channels.
Eenvoudig delen via LAN tussen IFP en slot-in-apparaat:	10/100/1000M (USB Type-C 10M/100M, OPS 1000M)
Light Sensor:	Yes

STROOM

Spanning:	100-240VAC +/- 10% Wide Range
Consumptie:	On:110.82W Off mode <0.5W

ERGONOMICS

Wandmontage (VESA®):	800mm x 400mm
----------------------	---------------

OPERATING CONDITIONS

Temperatuur (° C):	0°C to 40°C
Luchtvochtigheid:	20% ~ 80% RH non-condensing

AFMETINGEN (B X H X D)

Fysiek (inch/mm):	67.2 x 40.2 x 3.4 in / 1708 x 1020 x 85.7 mm
Verpakking (inch / mm):	73.3 x 44.9 x 8.9 in / 1863 x 1140 x 225 mm

WEIGHT

Netto (lb / kg):	109.35lb/49.60kg
Bruto (lb/kg):	137.35lb/62.30kg

REGULATIONS

US NRTL w/ CA, FCC/ICES003, DOE Energy Star, DOE EPEAT, CE EMC, LVD or CB, RoHS Green BOM & RoHS DoC, ErP, REACH SVHC List & DoC, EEL, WEEE, GOST-R / EAC, FF, LBL, ErP-Eco, SCIP, Annex I, Annex II, TPCH DoC, Packing waste, CA65 DoC

VERPAKKINGSINHOUD

- 3m power cable
- HDMI 2.0 cable 3m x 1 (HDMI LA certified)
- Remote control with AAA battery (Opt.)
- 3m USB 2.0 touch cable x 1
- Touch pen (Passive pen) x 2 (VB-PEN-002)
- Quick Start Guide + Compliance Statement
- RS232 adapter
- Screw (wall mount 4)
- Camera Plate

COMPATIBLE SLOT-IN PC

Configurable OS, Windows, Google EDLA ; VPC-A31-O1/VPC33 series/VPC35 series/VPC37 series